


Contact:

Tony@AJMLightingGroup.com

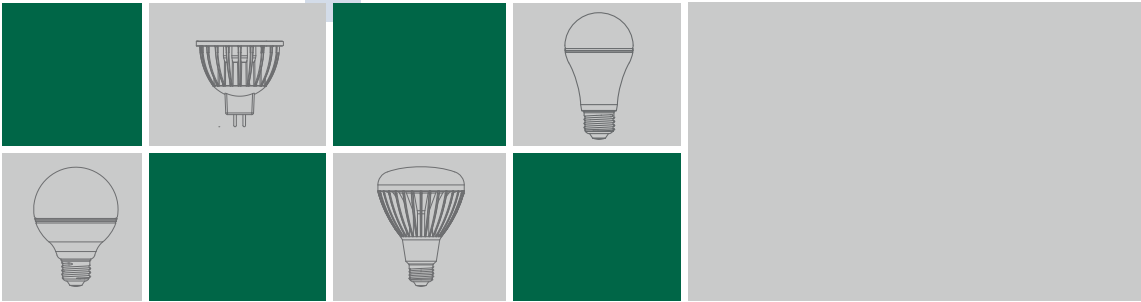

"The Power Behind Energy Conservation"

Catalog

LED PRODUCT LINE

AJMLIGHTINGGROUP.COM



OFFERING



LED Bulbs

For Every Need



Specifications

Model number	AJM-GD08/27K
Lumen output	550lm
Wattage	8w
Voltage	120v
Life time	40,000h
CCT	2700k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmalbe	Yes



Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Washing Room


5
warranty years

60
watt equivalent

550
lumen output

40,000
lifetime hours

110°
beam angle

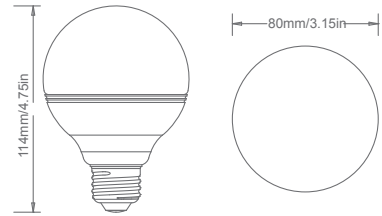

Mechanical Drawing



Features

- Commercial quality
- Osram Chip
- US imported IC
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-MR0636
Lumen output	300lm
Wattage	6w
Voltage	12v
Life time	25,000h
CCT	3000k
CRI	Ra>80
Base	GU5.3
Power factor	>70%
Dimmable	NO

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Kitchens

5 warranty years	35 watt equivalent	300 lumen output	25,000 lifetime hours	36° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	--------------------------

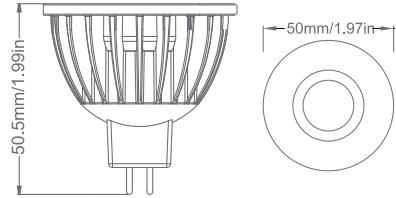

Mechanical Drawing



Features

- US imported IC
- Nichia Chip
- Die-Cast aluminum
- CRI higher than 80
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications

Model number	AJM-GUD0636
Lumen output	300lm
Wattage	6w
Voltage	120v
Life time	50,000h
CCT	3000k
CRI	Ra>80
Base	GU10
Power factor	>70%
Dimmalbe	Yes



Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Living Room


3
warranty
years

35
watt
equivalent

300
lumen
output

50,000
lifetime
hours

36°
beam
angle

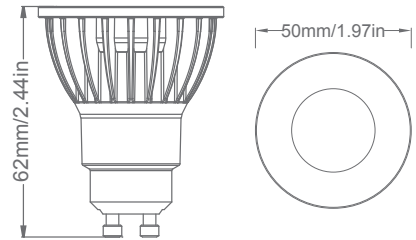

Mechanical Drawing

Features

- US imported IC
- Nichia Chip
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT
2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications




Model number	AJM-PD0636
Lumen output	300lm
Wattage	6w
Voltage	120v
Life time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Households

3 warranty years	60 watt equivalent	300 lumen output	50,000 lifetime hours	36° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	--------------------------

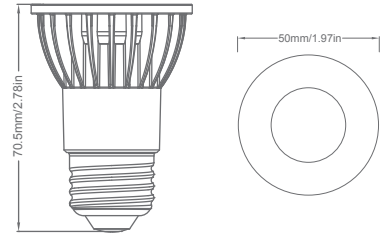

Mechanical Drawing

Features

- US imported IC
- Nichia Chip
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications

Model number	AJM-PD0636SN
Lumen output	300lm
Wattage	6w
Voltage	120v
Life time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmalbe	Yes



Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Living Room

3

warranty
years

35

watt
equivalent

300


lumen
output

50,000

lifetime
hours

36°

beam
angle



Mechanical Drawing

Features

- US imported IC
- Nichia Chip
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT
2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications



Model number	AJM-MR35
Lumen output	300lm
Wattage	3.5w
Voltage	12v
Life time	25,000h
CCT	3000k
CRI	Ra>80
Base	GU4
Power factor	>50%
Dimmable	No

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Shopping mall

3

warranty
years

20

watt
equivalent

150


lumen
output

25,000

lifetime
hours

24°

beam
angle



Mechanical Drawing

Features

- US imported IC
- Philip SMD
- Aluminum heat sink
- Long life
- 80°C, 500h oven test
- 4 hours aging time



NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-CD0402
Lumen output	200lm
Wattage	4w
Voltage	120v
Life time	30,000h
CCT	3000k
CRI	Ra>80
Base	E12
Power factor	>70%
Dimmalbe	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Restaurants

3 warranty years	25 watt equivalent	200 lumen output	30,000 lifetime hours	300° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	---------------------------



Mechanical Drawing

Features

- US imported IC
- Samsung Chip
- Linear dimming
- CRI higher than 80
- 80°C, 500h oven test
- 4 hours aging time



NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.CUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-CD0501
Lumen output	320lm
Wattage	5.1w
Voltage	120v
Life time	50,000h
CCT	3000k
CRI	Ra>80
Base	E12
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Living Room

5 warranty years	40 watt equivalent	320 lumen output	50,000 lifetime hours	300° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	---------------------------

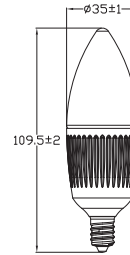

Mechanical Drawing



Features

- US imported IC
- Sharp Chip
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K and 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-AD0803
Lumen output	600lm
Wattage	8w
Voltage	120v
Life time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmalbe	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Households

5

warranty years

50

watt equivalent

600


lumen output

50,000

lifetime hours

110°

beam angle

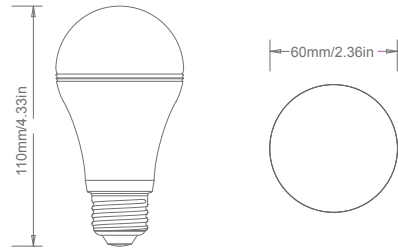

Mechanical Drawing



Features

- US imported IC
- Osram Chip
- Smooth design
- Linear dimming
- CRI higher than 80
- Inner heat radiator
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications


Model number	AJM-PD0825	AJM-PD0860
Lumen output	500lm	500lm
Wattage	8w	8w
Voltage	120v	120v
Life time	50,000h	50,000h
CCT	3000k	3000k
CRI	Ra>80	Ra>80
Base	E26	E26
Beam angle	25°	60°
Dimmable	Yes	Yes



Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Washing Room

5	50	500	50,000	25/60°
warranty years	watt equivalent	lumen output	lifetime hours	beam angle

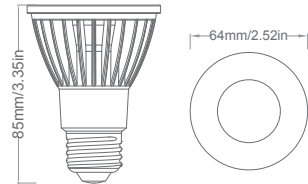

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-PD1425	AJM-PD1460
Lumen output	800lm	800lm
Wattage	14w	14w
Voltage	120v	120v
Life time	50,000h	50,000h
CCT	3000k	3000k
CRI	Ra>80	Ra>80
Base	E26	E26
Beam angle	25°	60°
Dimmalbe	Yes	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Offices

5

warranty years

75

watt equivalent

800


lumen output

50,000

lifetime hours

25/60°

beam angle

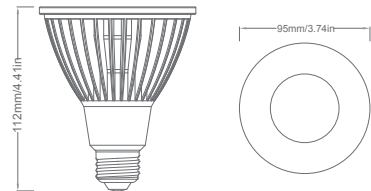

Mechanical Drawing



Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-PD1425SN	AJM-PD1460SN
Lumen output	800lm	800lm
Wattage	14w	14w
Voltage	120v	120v
Life time	50,000h	50,000h
CCT	3000k	3000k
CRI	Ra>80	Ra>80
Base	E26	E26
Beam angle	25°	60°
Dimmable	Yes	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Living room

5

warranty years

75

watt equivalent

800


lumen output

50,000

lifetime hours

25/60°

beam angle

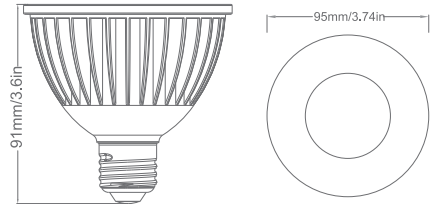

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-PD2025	AJM-PD2060
Lumen output	1200lm	1200lm
Wattage	20w	20w
Voltage	120v	120v
Life time	50,000h	50,000h
CCT	3000k	3000k
CRI	Ra>80	Ra>80
Base	E26	E26
Beam angle	25°	60°
Dimmable	Yes	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Museums

5

warranty years

90

watt equivalent

1200


lumen output

50,000

lifetime hours

25/60°

beam angle

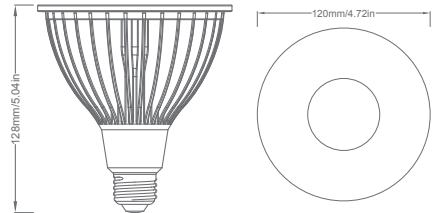

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications


Model number	AJM-RD08
Lumen output	500lm
Wattage	8w
Voltage	120v
Lifete time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes



Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Banks

5 warranty years	50 watt equivalent	500 lumen output	50,000 lifetime hours	110° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	---------------------------

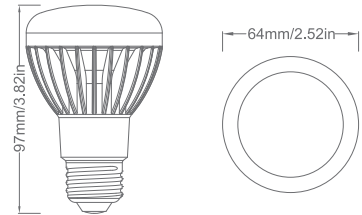

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Reflector inside
- 80°C, 500h oven test
- 4 hours aging time



NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K, 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-RD14
Lumen output	900lm
Wattage	14w
Voltage	120v
Lifetime	50,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Shops

5 warranty years	75 watt equivalent	900 lumen output	50,000 lifetime hours	110° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	---------------------------

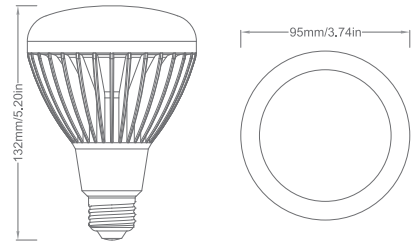

Mechanical Drawing



Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Reflector inside
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-RDGU14
Lumen output	900lm
Wattage	14w
Voltage	120v
Lifetime	50,000h
CCT	3000k
CRI	Ra>80
Base	GU24
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Shops

5 warranty years	75 watt equivalent	900 lumen output	50,000 lifetime hours	110° beam angle
----------------------------	------------------------------	----------------------------	---------------------------------	---------------------------

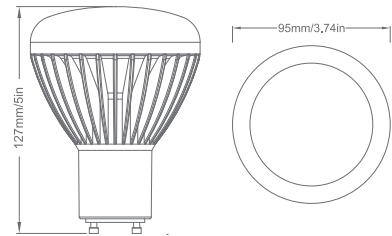

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Reflector inside
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-RD20
Lumen output	1300lm
Wattage	20w
Voltage	120v
Lifte time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Living Room

5

warranty years

110

watt equivalent

1300


lumen output

50,000

lifetime hours

110°

beam angle

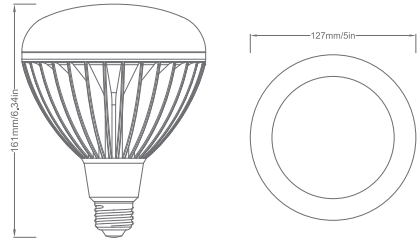

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- Commercial quality
- Reflector inside
- 80°C, 500h oven test
- 4 hours aging time



NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications




Model number	AJM-PD082503	AJM-PD084003	AJM-PD086003
Lumen output	500lm	500lm	500lm
Wattage	8w	8w	8w
Voltage	120v	120v	120v
Life time	30,000h	30,000h	30,000h
CCT	3000k	3000k	3000k
CRI	Ra>80	Ra>80	Ra>80
Base	E26	E26	E26
Beam angle	25°	40°	60°
Dimmable	Yes	Yes	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Washing Room

3	50	500	30,000	25/40/60°
warranty years	watt equivalent	lumen output	lifetime hours	beam angle

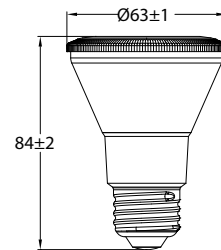

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Aluminum heat sink
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-PD152503	AJM-PD154003	AJM-PD156003
Lumen output	800lm	800lm	800lm
Wattage	15w	15w	15w
Voltage	120v	120v	120v
Life time	30,000h	30,000h	30,000h
CCT	3000k	3000k	3000k
CRI	Ra>80	Ra>80	Ra>80
Base	E26	E26	E26
Beam angle	25°	40°	60°
Dimmable	Yes	Yes	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Offices

3

warranty years

75

watt equivalent

800


lumen output

30,000

lifetime hours

25/40/60°

beam angle

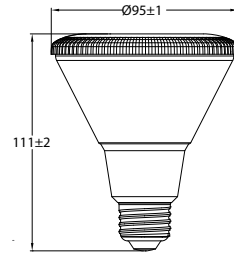

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Aluminum heat sink
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications


Model number	AJM-PD162503	AJM-PD164003	AJM-PD166003
Lumen output	950lm	950lm	950lm
Wattage	16w	16w	16w
Voltage	120v	120v	120v
Life time	30,000h	30,000h	30,000h
CCT	3000k	3000k	3000k
CRI	Ra>80	Ra>80	Ra>80
Base	E26	E26	E26
Beam angle	25°	40°	60°
Dimmable	Yes	Yes	Yes



Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Washing Room

3	90	950	30,000	25/40/60°
warranty years	watt equivalent	lumen output	lifetime hours	beam angle

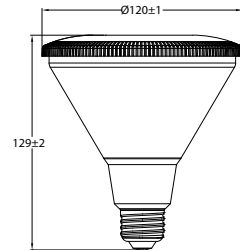

Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Aluminum heat sink
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time



NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-RD0803
Lumen output	500lm
Wattage	8w
Voltage	120v
Lifet time	30,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Offices

3

warranty years

50

watt equivalent

500


lumen output

30,000

lifetime hours

110°

beam angle



Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Aluminum heat sink
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 3000K and 4000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-RD1503
Lumen output	1000lm
Wattage	15w
Voltage	120v
Lifete time	30,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Boutiques

3

warranty years

75

watt equivalent

1000


lumen output

30,000

lifetime hours

110°

beam angle

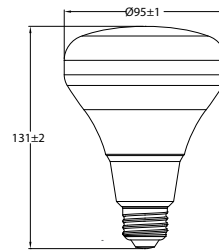

Mechanical Drawing

Features

- US imported IC
- Nichia SMD
- Aluminum heat sink
- Linear dimming
- Retail quality
- Reflector inside
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K and 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-RD1603
Lumen output	1300lm
Wattage	16w
Voltage	120v
Lifete time	30,000h
CCT	3000k
CRI	Ra>80
Base	E26
Power factor	>70%
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Shops

3

warranty
years

90

watt
equivalent

1300


lumen
output

30,000

lifetime
hours

110°

beam
angle

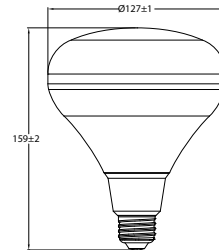

Mechanical Drawing

Features

- US imported IC
- Nichia SMD
- Aluminum heat sink
- Linear dimming
- Retail quality
- Reflector inside
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. Choice of CCT 2700K, 3000K, 4000K and 5000K
2. Energy star listed for 2700K and 3000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001



Specifications




Model number	AJM-IL06	AJM-IL13
Lumen output	450lm	850lm
Wattage	6w	13w
Voltage	120v	120v
Life time	50,000h	50,000h
CCT	3000k	3000k
Base	S14S	S14S
Dimension	500mm	1000mm
Power factor	>90%	>90%
Dimmable	No	No

Applications

- Closets in hotels

5 warranty years	450 850 lumen output	50,000 lifetime hours	120° beam angle
-------------------------------	---------------------------------------	------------------------------------	------------------------------

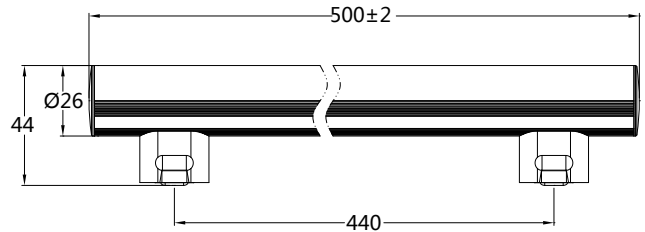

Mechanical Drawing

Features

- Internal Driver
- Epistar led
- High Power factor
- Long life time
- 80°C, 800h oven test
- 6 hours aging time



NOTE

1. Choice of CCT 3000K, 4000K and 5000K
2. DLC listed for 3000K, 4000K and 5000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-T824
Lumen output	4400lm
Wattage	50w
Voltage	100-277v
LED chip	50,000h
CCT	5000k
CRI	Ra>80
Dimension	2x4inch
Power factor	>0.9
Dimmable	No

Applications

- Residential
- Commercial
- Hospitality
- Offices
- Hotels
- Schools
- Shopping mall

5	4400	50,000	110°
warranty years	lumen output	lifetime hours	beam angle

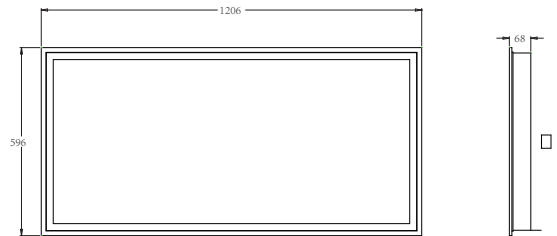

Mechanical Drawing



Features

- External Driver
- Direct light
- THD less than 20%
- High Power factor
- CRI higher than 80
- Long life time
- 80°C, 800h oven test
- 6 hours aging time

NOTE

1. Choice of CCT
3500K, 4000K and 5000K
2. All are DLC, UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-T238
Lumen output	3200lm
Wattage	38w
Voltage	100-277v
LED chip	50,000h
CCT	5000k
CRI	Ra>80
Dimension	2x2inch
Power factor	>0.9
Dimmable	No

Applications

- Residential
- Commercial
- Hospitality
- Offices
- Hotels
- Schools
- Shopping mall

5	3200	50,000	110°
warranty years	lumen output	lifetime hours	beam angle

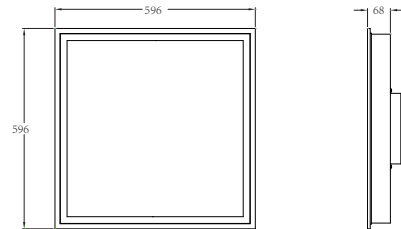

Mechanical Drawing



Features

- External Driver
- Direct light
- THD less than 20%
- High Power factor
- CRI higher than 80
- Long life time
- 80°C, 800h oven test
- 6 hours aging time

NOTE

1. Choice of CCT
3500K, 4000K and 5000K
2. All are DLC, UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-T425
Lumen output	2200lm
Wattage	25w
Voltage	100-277v
Life time	50,000h
CCT	5000k
CRI	>80
Dimension	1x4inch
Power factor	>90%
Dimmable	No

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Offices

5	2200	50,000	110°
warranty years	lumen output	lifetime hours	beam angle

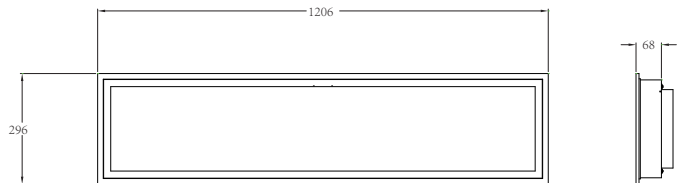

Mechanical Drawing



Features

- External Driver
- Direct light
- THD less than 20%
- High Power factor
- CRI higher than 80
- Long life time
- 80°C, 800h oven test
- 6 hours aging time

NOTE

1. Choice of CCT 3000K, 4000K and 5000K
2. DLC listed for 3000K, 4000K and 5000K
3. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001






Specifications

Model number	AJM-4RD08
Lumen output	500lm
Wattage	8w
Voltage	120v
Lifete time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26/GU24
Size	4 inch
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Shops

5 warranty years	4 inch size	500 lumen output	50,000 lifetime hours	110° beam angle
-------------------------------	--------------------------	-------------------------------	------------------------------------	------------------------------

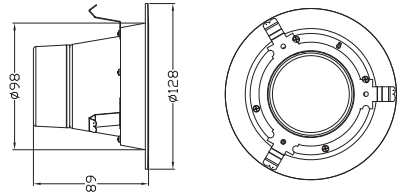

Mechanical Drawing



Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. E26 or GU24 connector available
2. Choice of CCT 2700K, 3000K, 4000K and 5000K
3. Energy star listed for 3000K, 5000K
4. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-5RD14
Lumen output	950lm
Wattage	14w
Voltage	120v
Lifte time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26/GU24
Size	5 inch
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Restaurants

3

warranty
years

5

inch
size

950


lumen
output

50,000

lifetime
hours

110°

beam
angle

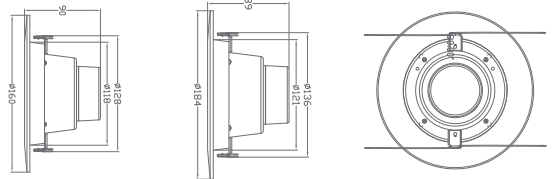

Mechanical Drawing



Features

- US imported IC
- Cltizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. E26 or GU24 connector available
2. Choice of CCT
2700K, 3000K, 4000K and 5000K
3. Energy star listed for 3000K, 5000K
4. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-56RD14
Lumen output	850lm
Wattage	14w
Voltage	120v
Lifte time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26/GU24
Size	5+6 inch
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Meeting Room

5

warranty years

5+6

inch size

850



lumen output

50,000

lifetime hours

110°

beam angle



Mechanical Drawing

Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time



NOTE

1. E26 or GU24 connector available
2. Choice of CCT 2700K, 3000K, 4000K and 5000K
3. Energy star listed for 3000K, 5000K
4. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001





Specifications

Model number	AJM-6RD14
Lumen output	950lm
Wattage	14w
Voltage	120v
Lifte time	50,000h
CCT	3000k
CRI	Ra>80
Base	E26/GU24
Size	6 inch
Dimmable	Yes

Applications

- Residential
- Commercial
- Hospitality
- Retail
- Hotels
- Schools
- Shopping malls

5

warranty
years

6

inch
size

600



lumen
output

50,000

lifetime
hours

110°

beam
angle



Mechanical Drawing



Features

- US imported IC
- Citizen COB
- Die-Cast aluminum
- Linear dimming
- CRI higher than 80
- Long life
- 80°C, 500h oven test
- 4 hours aging time

NOTE

1. E26 or GU24 connector available
2. Choice of CCT
2700K, 3000K, 4000K and 5000K
3. Energy star listed for 3000K, 5000K
4. All are UL.cUL listed.

ISO9001.ISO14001.OHSAS18001

